




## How to save a test when Wiremap has failed

Note that the instructions below apply to firmware versions 3.2.xx and below. Firmware versions 3.3.xx and higher do not require any settings changes to allow saving of test results when wiremap fails.

- From the main screen on TestPro or NSA, go to Settings->Certifier/Validator Settings->Auto Start.



- From the main screen on TestPro or NSA, go to Settings->Certifier/Validator Settings->Auto Start.

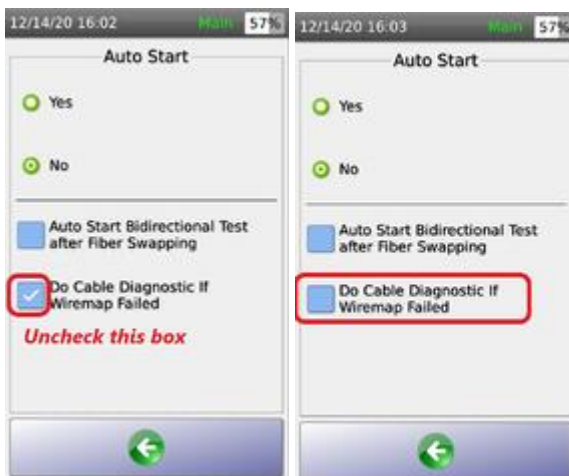

- Press Home button to return to home screen. Run Autotest and save results.